


# Standard CPU Module Specifications


CO-01AR-D <--->

8 AC Input/6 Relay Output Micro PLC

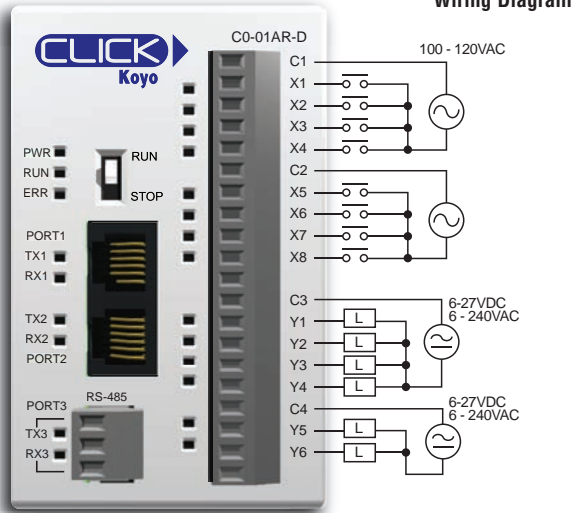


**NOTE:** When using Standard CPUs, you must use CLICK programming software version V1.20 or later.

## Equivalent Input Circuit

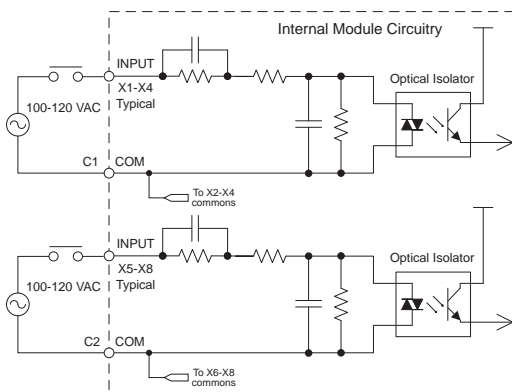

## Equivalent Output Circuit

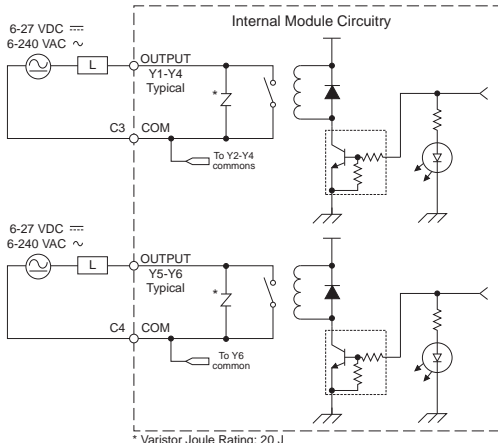

\* Varistor Joule Rating: 20 J


CO-01AR-D Built-in I/O Specifications - Inputs	
<b>Inputs per Module</b>	8
<b>Operating Voltage Range</b>	100-120 VAC
<b>Input Voltage Range</b>	80-144 VAC
<b>AC Frequency</b>	47-63 Hz
<b>Input Current</b>	8.5 mA @ 100 VAC at 50 Hz 10 mA @ 100 VAC at 60 Hz
<b>Maximum Input Current</b>	16 mA @ 144 VAC
<b>Input Impedance</b>	15 kΩ @ 50 Hz 12 kΩ @ 60 Hz
<b>ON Voltage Level</b>	> 60 VAC
<b>OFF Voltage Level</b>	< 20 VAC
<b>Minimum ON Current</b>	5 mA
<b>Maximum OFF Current</b>	2 mA
<b>OFF to ON Response</b>	< 40 ms
<b>ON to OFF Response</b>	< 40 ms
<b>Status Indicators</b>	Logic Side (8 points, green LED)
<b>Commons</b>	2 (4 points/common) Isolated

CO-01AR-D Built-in I/O Specifications - Outputs	
<b>Outputs per Module</b>	6
<b>Operating Voltage Range</b>	6-240 VAC (47-63 Hz), 6-27 VDC
<b>Output Voltage Range</b>	5-264 VAC (47-63 Hz), 5-30 VDC
<b>Output Type</b>	Relay, form A (SPST)
<b>Maximum Current</b>	1 A/point; C3: 4A/common, C4: 2A/common
<b>Minimum Load Current</b>	5 mA @ 5 VDC
<b>Maximum Inrush Current</b>	3 A for 10 ms
<b>OFF to ON Response</b>	< 15 ms
<b>ON to OFF Response</b>	< 15 ms
<b>Status Indicators</b>	Logic Side (6 points, red LED)
<b>Commons</b>	2 (4 points/com & 2 points/com) Isolated

## General Specifications

<b>Current Consumption at 24VDC</b>	140 mA
<b>Terminal Block Replacement Part No.</b>	CO-16TB
<b>Weight</b>	5.6 oz (160 g)

## CO-01AR-D Temperature Derating Chart

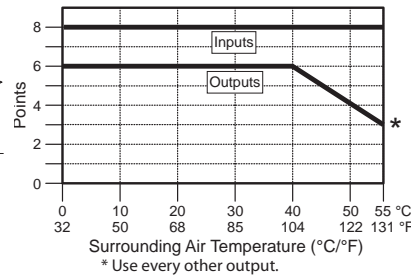

## Typical Relay Life (Operations) at Room Temperature

Voltage & Load Type	Load Current: 1 A
30 VDC Resistive	300,000 cycles
30 VDC Solenoid	50,000 cycles
250 VAC Resistive	500,000 cycles
250 VAC Solenoid	200,000 cycles

ON to OFF = 1 cycle

**ZL-RTB20**  
20-pin feed-through connector module



20-pin connector cable  
ZL-C0-CBL20 (0.5 m length)  
ZL-C0-CBL20-1 (1.0 m length)  
ZL-C0-CBL20-2 (2.0 m length)



# CLICK Specifications

## CPU Module Specifications

CPU Module Specifications			
	Basic CPU	Standard CPU	Analog CPU
<b>Control Method</b>	Stored Program/Cyclic execution method	Stored Program/Cyclic execution method	Stored Program/Cyclic execution method
<b>I/O Numbering System</b>	Fixed in Decimal	Fixed in Decimal	Fixed in Decimal
<b>Ladder Memory (steps)</b>	8000	8000	8000
<b>Total Data Memory (words)</b>	8000	8000	8000
<b>Contact Execution (boolean)</b>	< 0.6us	< 0.6us	< 0.6us
<b>Typical Scan (1k boolean)</b>	1-2 ms	1-2 ms	1-2 ms
<b>RLL Ladder Style Programming</b>	Yes	Yes	Yes
<b>Run Time Edits</b>	No	No	No
<b>Scan</b>	Variable / fixed	Variable / fixed	Variable / fixed
<b>CLICK Programming Software for Windows</b>	Yes	Yes	Yes
<b>Built-in Communication Ports</b>	Yes (two RS-232 ports)	Yes (two RS-232 ports and one RS-485 port)	Yes (two RS-232 ports and one RS-485 port)
<b>FLASH Memory</b>	Standard on CPU	Standard on CPU	Standard on CPU
<b>Built-in Discrete I/O points</b>	8 inputs, 6 outputs	8 inputs, 6 outputs	4 inputs, 4 outputs
<b>Built-in Analog I/O Channels</b>	No	No	2 inputs, 2 outputs
<b>Number of Instructions Available</b>	21	21	21
<b>Control Relays</b>	2000	2000	2000
<b>System Control Relays</b>	1000	1000	1000
<b>Timers</b>	500	500	500
<b>Counters</b>	250	250	250
<b>Interrupt</b>	Yes (external: 8 / timed: 4)	Yes (external: 8 / timed: 4)	Yes (external: 4 / timed: 4)
<b>Subroutines</b>	Yes	Yes	Yes
<b>For/Next Loops</b>	Yes	Yes	Yes
<b>Math (Integer and Hex)</b>	Yes	Yes	Yes
<b>Drum Sequencer Instruction</b>	Yes	Yes	Yes
<b>Internal Diagnostics</b>	Yes	Yes	Yes
<b>Password Security</b>	Yes	Yes	Yes
<b>System Error Log</b>	Yes	Yes	Yes
<b>User Error Log</b>	No	No	No
<b>Memory Backup</b>	Super Capacitor	Super Capacitor + Battery	Super Capacitor + Battery
<b>Battery Backup</b>	No	Yes (battery sold separately; part # D2-BAT-1)	Yes (battery sold separately; part # D2-BAT-1)
<b>Calendar/Clock</b>	No	Yes	Yes
<b>I/O Terminal Block Replacement</b>	ADC p/n C0-16TB	ADC p/n C0-16TB	ADC p/n C0-16TB
<b>Communication Port &amp; Terminal Block Replacement</b>	N/A	ADC p/n C0-03TB	ADC p/n C0-03TB
<b>24 VDC Power Terminal Block Replacement</b>	ADC p/n C0-4TB	ADC p/n C0-4TB	ADC p/n C0-4TB

Field I/O

Software

C-more &amp; other HMI

Drives

Soft Starters

Motors &amp; Gearbox

Steppers/Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/Lights

Process

Relays/Timers

Comm.

Terminal Blocks &amp; Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Appendix


Product Index

Part # Index

# CLICK Specifications

## CPU Features


**Basic and Standard CPUs**

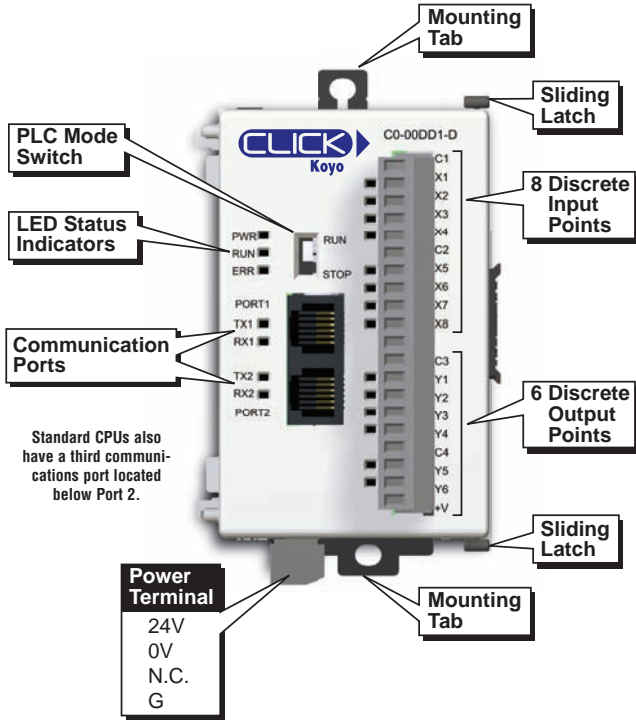

**Analog CPUs**






**Bottom of CPU**  
(Same on all models)

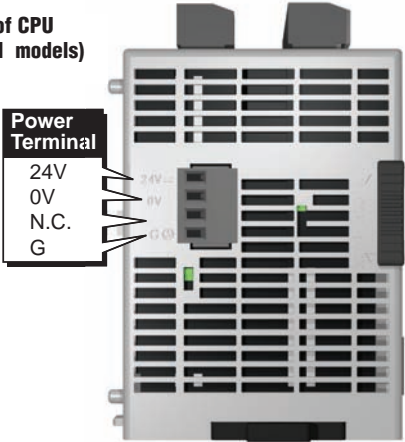

# CLICK Specifications

## CPU LED Status Indicators

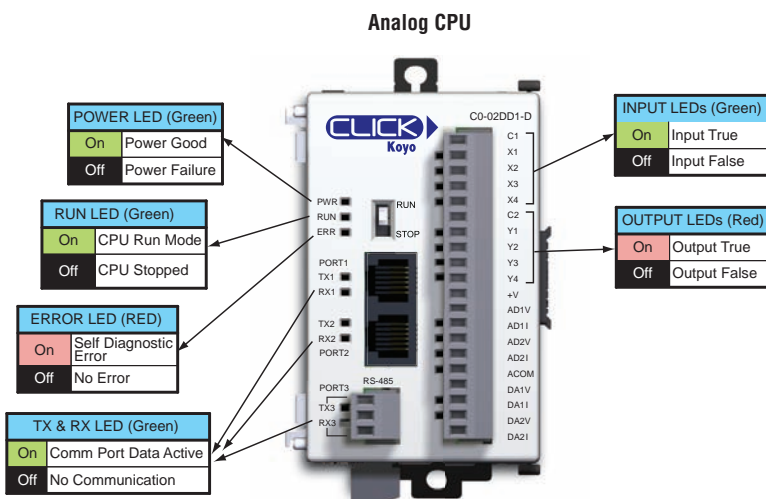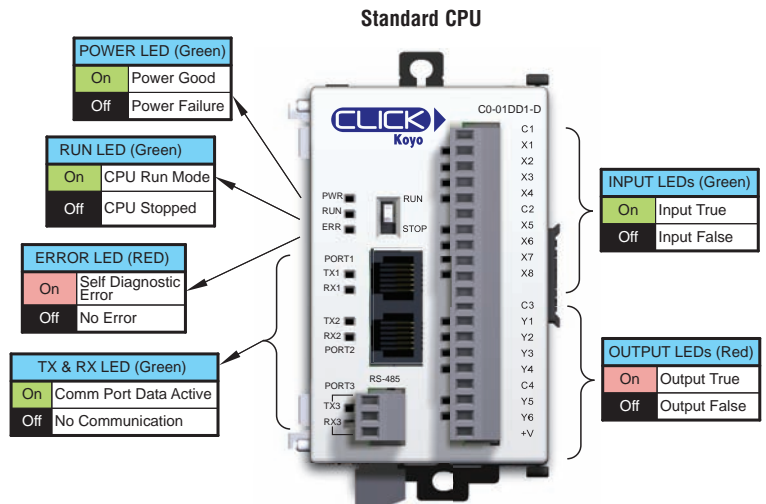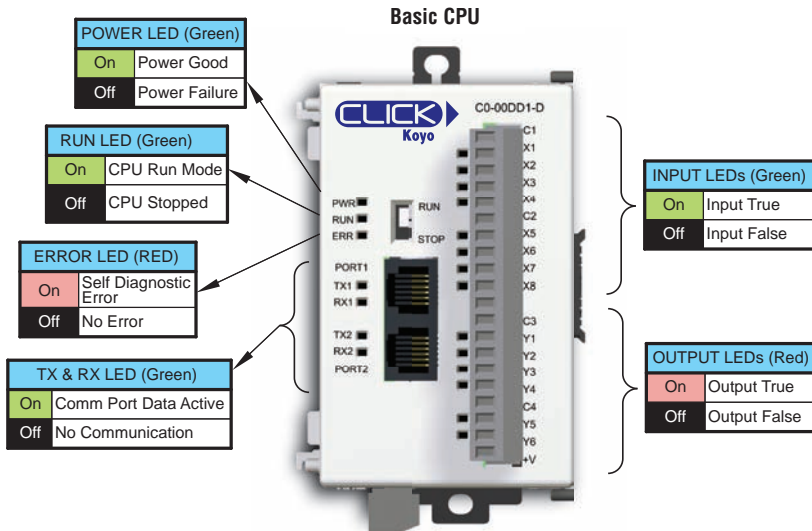


# Product Dimensions and Installation

It is important to understand the installation requirements for your CLICK system. Your knowledge of these requirements will help ensure that your system operates within its environmental and electrical limits.

## Plan for Safety

This catalog should never be used as a replacement for the user manual.

You can purchase, download free, or view online the user manuals for these products. Manual C0-USER-M is the user manual for the CLICK PLC. This user manual contains important safety information that must be followed. The system installation should comply with all appropriate electrical codes and standards.


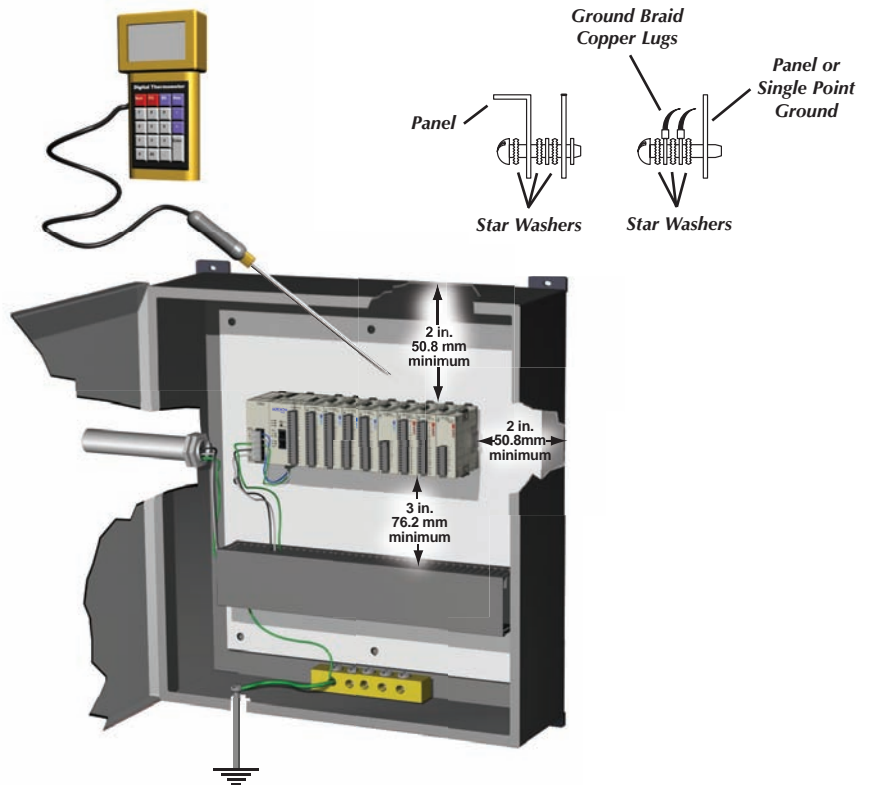


**NOTE:** THERE IS A MINIMUM CLEARANCE REQUIREMENT OF 2 INCHES (51 MM) BETWEEN THE CLICK PLC AND THE PANEL DOOR OR ANY DEVICES MOUNTED IN THE PANEL DOOR. THE SAME CLEARANCE IS REQUIRED BETWEEN THE PLC AND ANY SIDE OF THE ENCLOSURE. A MINIMUM CLEARANCE OF 3 INCHES (76 MM) IS REQUIRED BETWEEN THE PLC AND A WIREWAY OR ANY HEAT PRODUCING DEVICE.



## Mounting Orientation

CLICK PLCs must be mounted properly to ensure ample airflow for cooling purposes. It is important to follow the unit orientation requirements and to verify that the PLC's dimensions are compatible with your application. Notice particularly the grounding requirements and the recommended cabinet clearances.

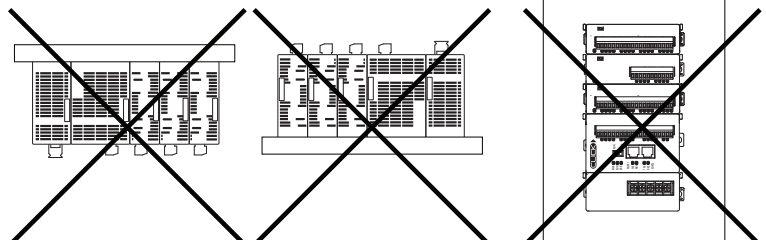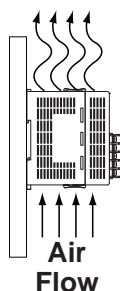




# Product Dimensions and Installation

## Connecting the Modules Together

CLICK CPUs, I/O modules and power supplies connect together using the extension ports that are located on the side panels of the modules (no PLC backplane/base required).


1. Remove extension port covers and slide the latch tabs forward.
2. Align the module pins and connection plug, and press the I/O module onto the right side of the CPU.
3. Slide the latch tabs backward to lock the modules together.

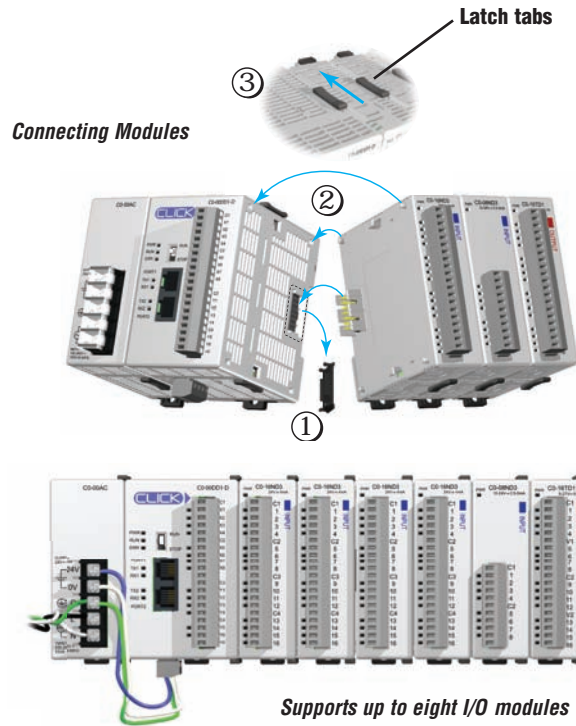

## Mounting

The CLICK PLC system, which includes the CLICK power supplies, CPU modules, and I/O modules, can be mounted in one of two ways.

1. DIN rail mounted
2. Surface mounted using the built-in upper and lower mounting tabs.

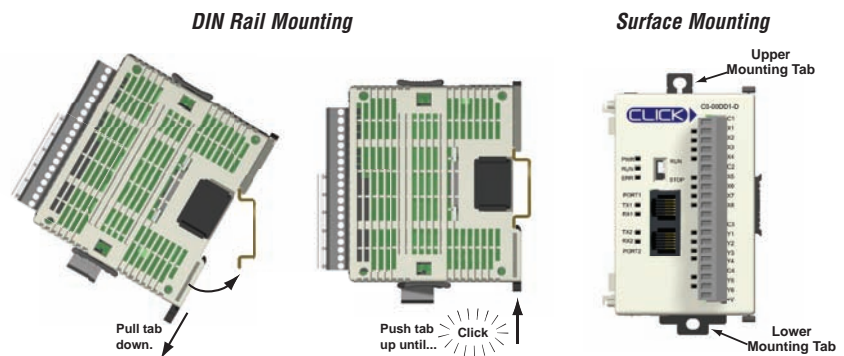


## Unit Dimensions

These diagrams show the outside dimensions of the CLICK power supply, CPU, and I/O modules. The CLICK PLC system is designed to be mounted on standard 35mm DIN rail, or it can be surface mounted.

Allow proper spacing from other components within an enclosure.

### Maximum system:


Power Supply + CPU + 8 I/O modules.

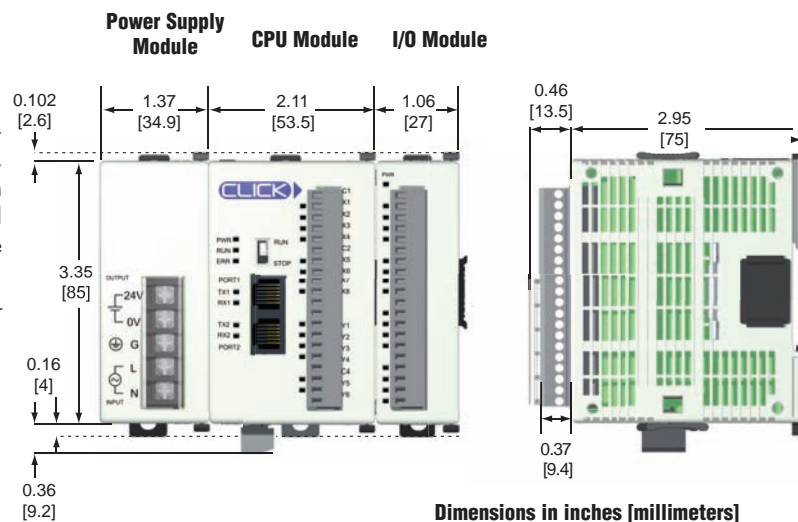

# Product Dimensions and Installation


## Unit Dimensions

### Power Supply

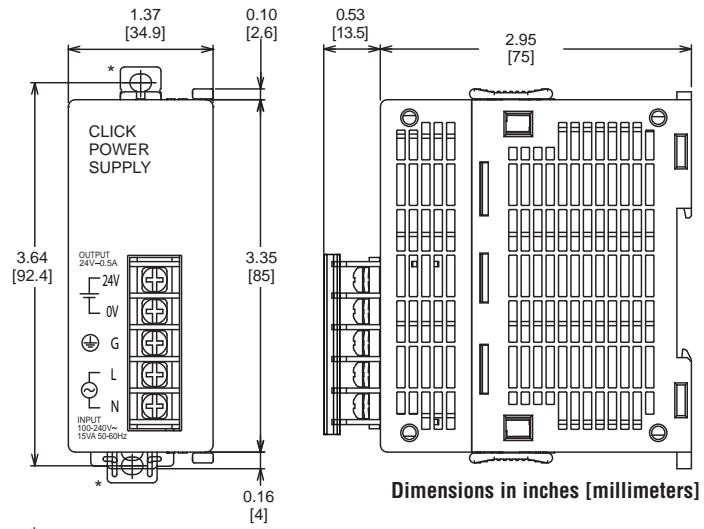


\* Use size M4 screws for top and bottom mounting tab holes.

### CPU Module

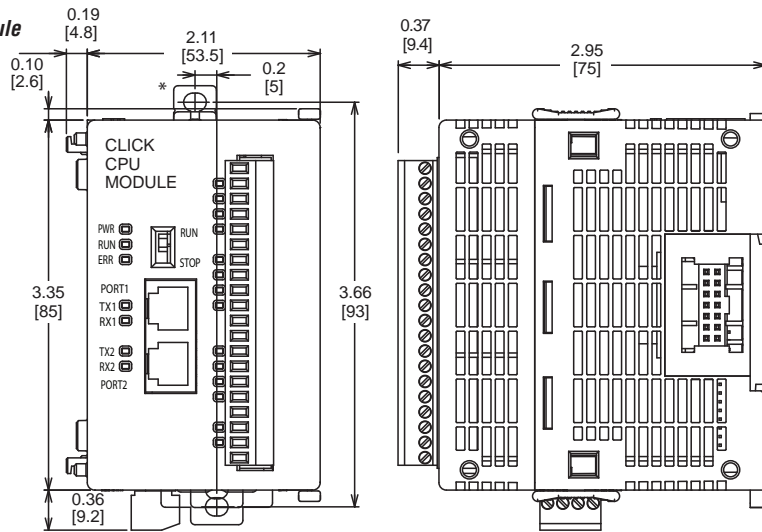

\* Use size M4 screws for top and bottom mounting tab holes.

### I/O Module

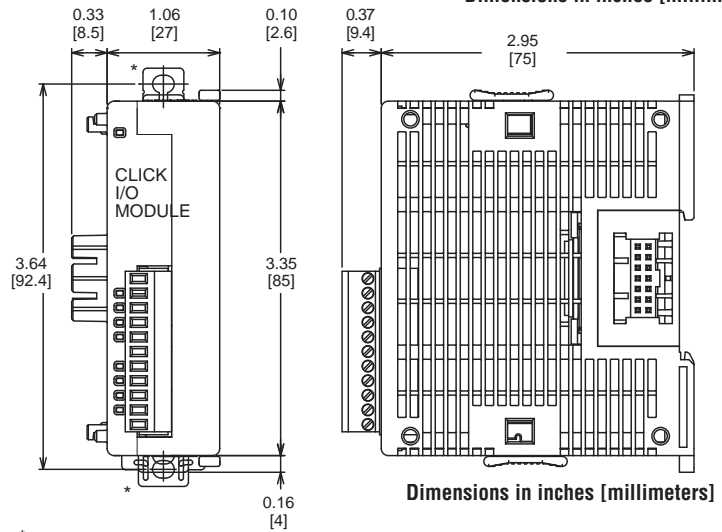

\* Use size M4 screws for top and bottom mounting tab holes.



# Networking the CLICK PLC

## Built-in Communications Ports


All CPUs have two built-in RS-232 communications ports. Standard and Analog CPUs also have one built-in RS-485 communications port. One RS-232 port supports the Modbus RTU protocol only and can be used as the programming port. The other ports support either Modbus RTU or ASCII protocol. Both RS-232 ports supply 5 VDC, so you can connect a monochrome C-more Micro HMI panel without an additional power supply.

## LED Status Indicators

There are LED indicators located to the left of each communication port to indicate when the port is transmitting or receiving.

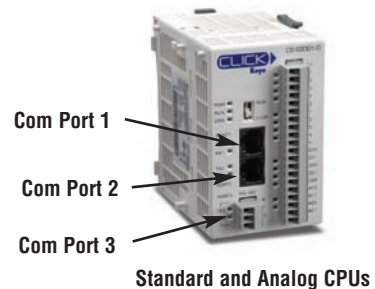

Com Port 1 Specifications	
Use:	Programming Port
Physical:	6 pin, RJ12, RS-232
Communication speed (baud):	38400 (fixed)
Parity:	Odd
Station Address:	1
Data length:	8 bits
Stop bit:	1
Protocol:	Modbus RTU (slave only)



Port 1 Pin Descriptions		
1	0V	Power (-) connection (GND)
2	5V	Power (+) connection
3	RXD	Receive data (RS-232)
4	TXD	Transmit data (RS-232)
5	NC	No connection
6	0V	Power (-) connection (GND)


### Basic CPUs

#### Port 1 & 2 LED Status Indicators


TX1 and TX2 (Green)	
On	The Comm Port is sending data.
Off	The Comm Port is not sending data.

RX1 and RX2 (Green)	
On	The Comm Port is receiving data.
Off	The Comm Port is not receiving data.



Com Port 2 Specifications	
Use:	Serial Communication
Physical:	6 pin, RJ12, RS-232
Communication speed (baud):	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
Parity:	odd, even, none
Station Address:	1 to 247
Data length:	8 bits (Modbus RTU) or 7, 8 bits (ASCII)
Stop bit:	1,2
Protocol:	Modbus RTU (master/slave) or ASCII in/out



Port 2 Pin Descriptions		
1	0V	Power (-) connection (GND)
2	5V	Power (+) connection
3	RXD	Receive data (RS-232)
4	TXD	Transmit data (RS-232)
5	RTS	Request to send
6	0V	Power (-) connection (GND)


### Standard and Analog CPUs

#### Port 1, 2, & 3 LED Status Indicators


TX1, TX2 and TX3 (Green)	
On	The Comm Port is sending data.
Off	The Comm Port is not sending data.

RX1, RX2 and RX3 (Green)	
On	The Comm Port is receiving data.
Off	The Comm Port is not receiving data.



Com Port 3 Specifications	
Use:	Serial Communication
Physical:	3 pin, RS-485
Communication speed (baud):	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
Parity:	odd, even, none
Station Address:	1 to 247
Data length:	8 bits (Modbus RTU) or 7, 8 bits (ASCII)
Stop bit:	1,2
Protocol:	Modbus RTU (master/slave) or ASCII in/out



Port 3 Pin Descriptions		
1	+ (plus)	Signal A (RS-485)
2	- (minus)	Signal B (RS-485)
3	LG	Logic Ground(0 V)

## Port Setup

Use CLICK programming software to easily configure the communication ports.

