


# Analog Voltage Input Module

T1F-08AD-2 <--->

## 8-channel analog voltage input module

The 8-channel voltage input module uses a T1K-08B or T1K-08B-1 base, which is purchased separately.

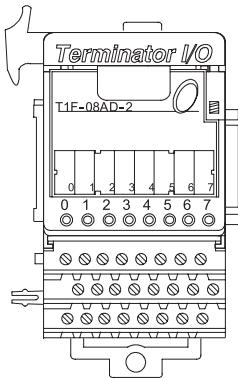


T1F-08AD-2 Analog Input Specification	
<b>Channels Per Module</b>	8 single-ended (1 common)
<b>Input Ranges</b>	0-5 V, 0-10 V, ±5V, ±10V
<b>Resolution</b>	14 bit (13 bits plus sign bit)
<b>Frequency Response</b>	-3 dB @ 500 Hz, -20 dB/decade
<b>Input Resistance</b>	200 kΩ min.
<b>Absolute Max. Ratings</b>	Fault protected input 130 V(rms) or 100 VDC
<b>Conversion Time</b>	Normal mode: 5 ms per channel (default); Fast mode*: 0.5 ms per channel
<b>Linearity Error</b>	± 2 count max.
<b>Input Stability</b>	Normal mode: ± 1 count (default); Fast mode*: ± 5 counts
<b>Calibration Full Scale Error</b>	8 counts max.
<b>Calibration Offset Error</b>	2 counts max.
<b>Max. Full Scale Inaccuracy (% of full scale); All errors included</b>	0.08% @ 25°C 0.26% @ 60°C
<b>Master Update Rate</b>	8 channels per scan max.
<b>Input Points Required</b>	256 discrete pts. or 8 Dwords (32-bit words) (Network Interface Dependent)
<b>Base Power Required</b>	75 mA @ 5 VDC
<b>External Module Power Required</b>	21.6-26.4 VDC, 50 mA, class 2
<b>Weight</b>	136 g

\* Fast mode is supported in module hardware version B or later.

Fast mode is only supported when using the analog module with the T1H-EBC(100) or T1H-PBC Interface module.

## Equivalent Input Circuit

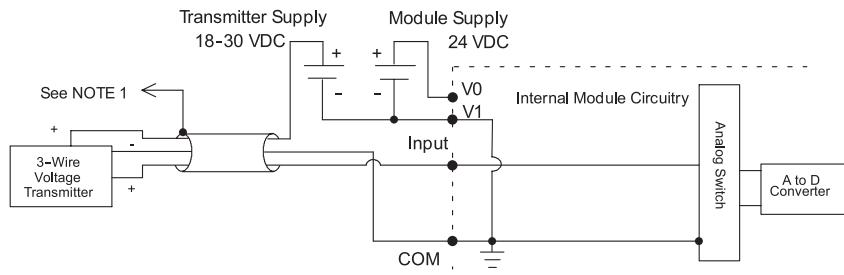

### NOTES:

- 1: Shields should be grounded at the signal source.
- 2: Unused inputs should be connected to common (0 VDC).
- 3: More than one external power supply can be used, provided all the power supply commons are connected.